
NOT TO SCALE

CRUSHED ROCK-RESIDENTIAL DRIVEWAY

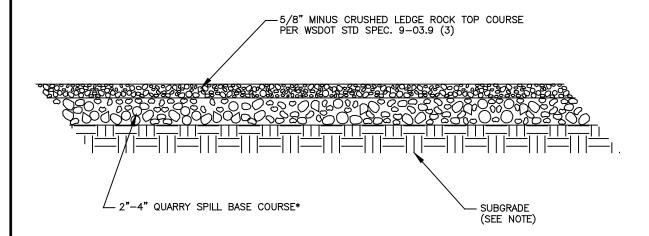

CONSTRUCTION NOTES:

SUBGRADE: SUBGRADE SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY AS DETERMINED BY THE MODIFIED PROCTOR (ASTM D 1557).

* RECYCLED CONCRETE ALLOWED WHEN APPROVED BY CITY ENGINEER.

GENERAL NOTES:

"THIS DETAIL IS ACCEPTABLE ONLY FOR ACCESS TO:
ONE DWELLING UNIT, SINGLE FAMILY RESIDENTIAL,
TEMPORARY ACCESS DURING CONSTRUCTION AS DETAILED
PER STANDARD DETAIL 503 STABILIZED CONSTRUCTION ENTRANCE".

APPROVED: RICHARD BARTHOL

REV. DATE: JULY 1, 2000

ENGINEERING DIVISION





STANDARD DETAILS

CRUSHED ROCK RESIDENTIAL DRIVEWAY SECTION

323